
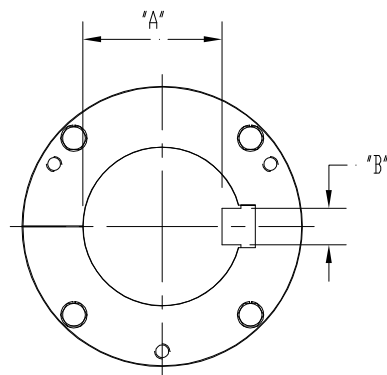
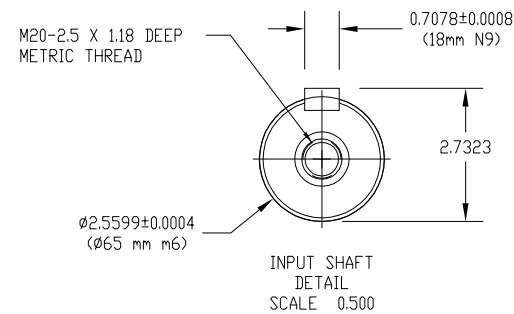
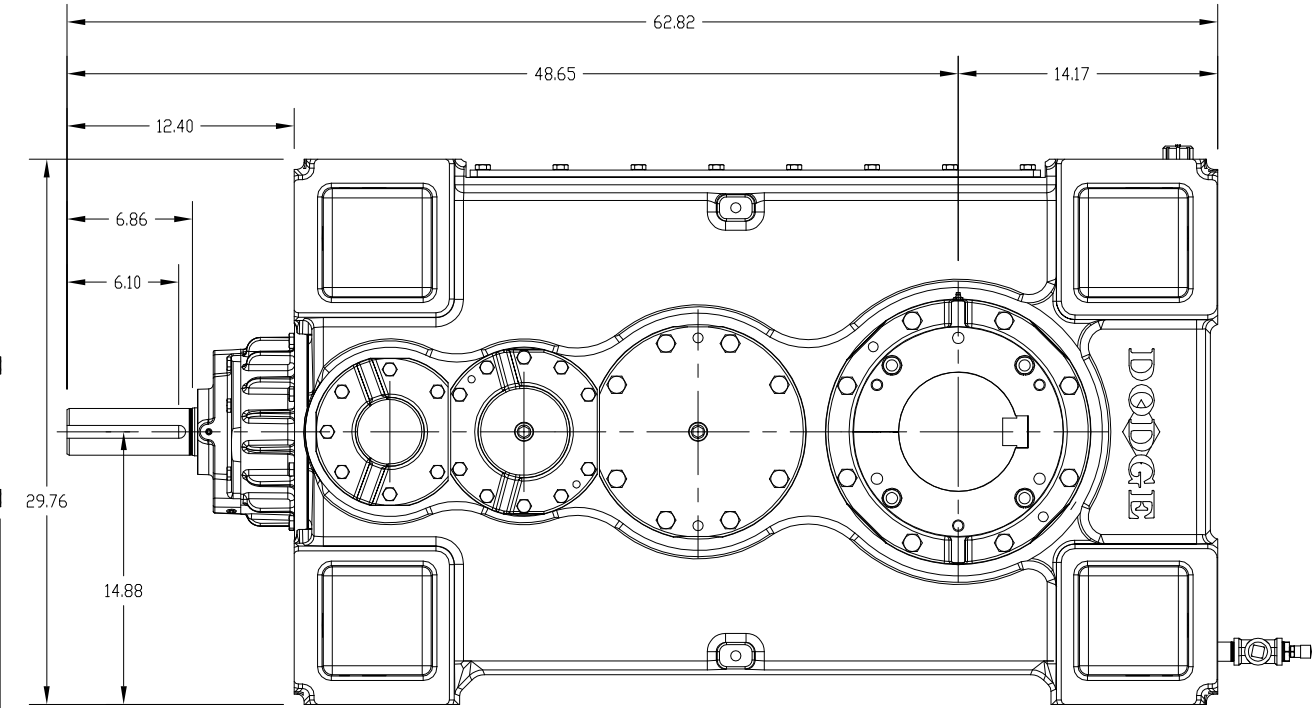
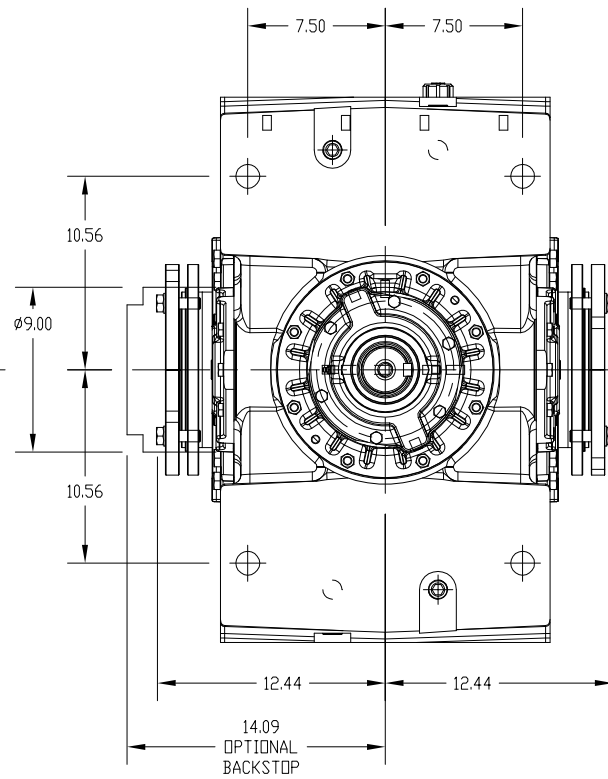
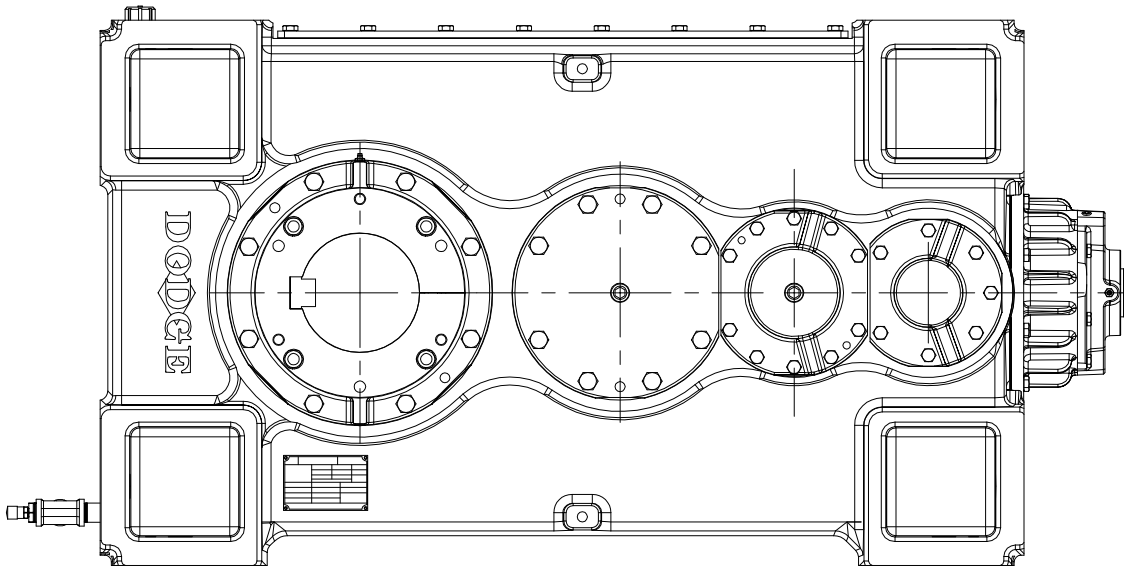
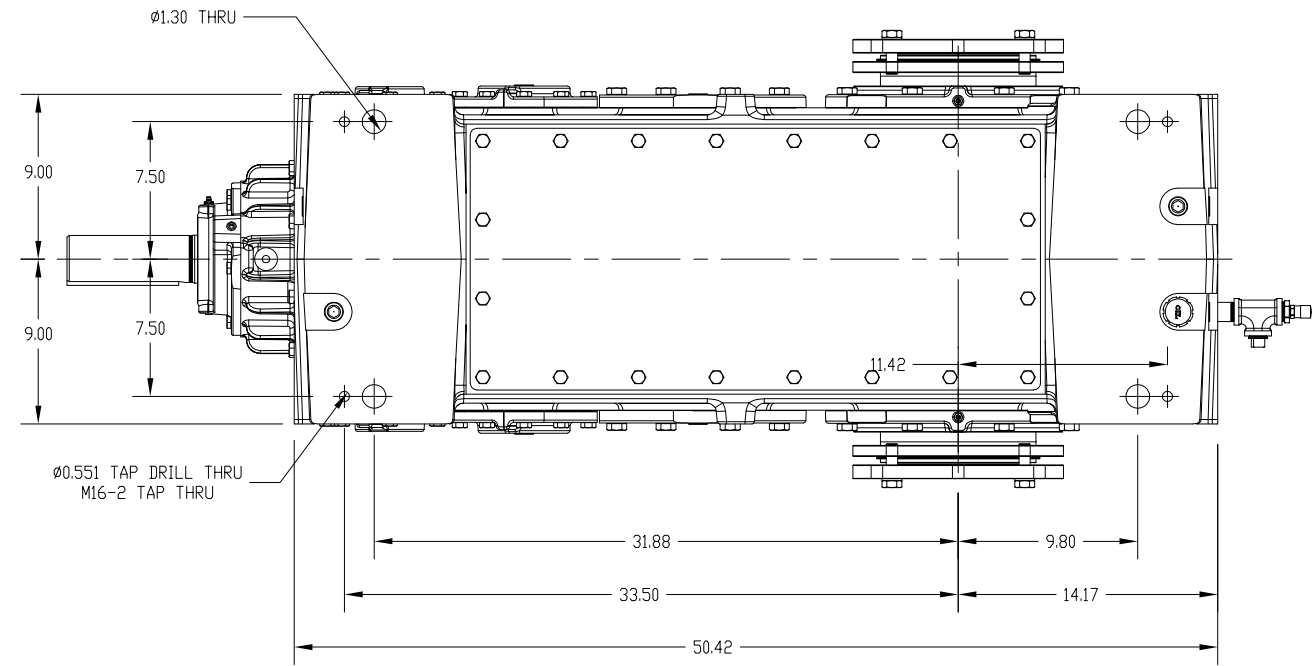
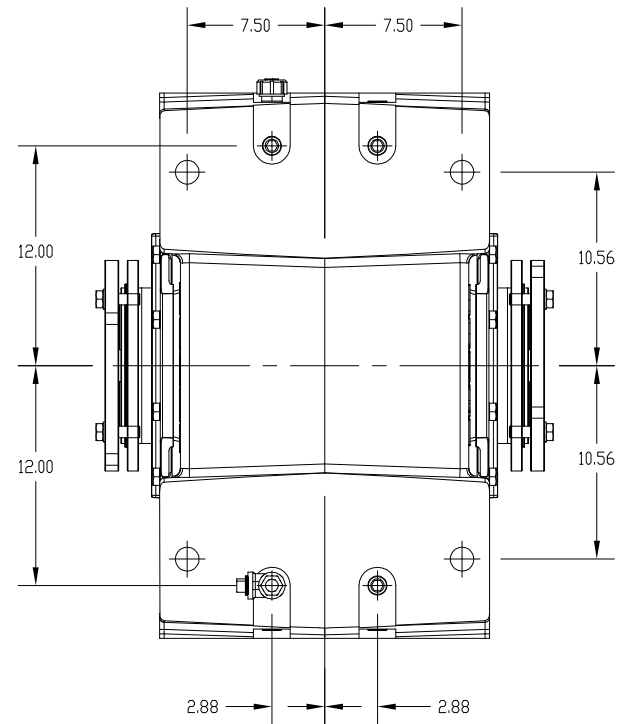


CUSTOMER ORDER NO.: \_\_\_\_\_  
 3 STAGE REDUCER  
 MODEL NUMBER: 390K  
 OVERALL RATIO: \_\_\_\_\_:1  
 AGMA CLASS 1 RATING: \_\_\_\_\_ HP @ \_\_\_\_\_ RPM  
 SERVICE FACTOR: \_\_\_\_\_  
 3034 Lbs.

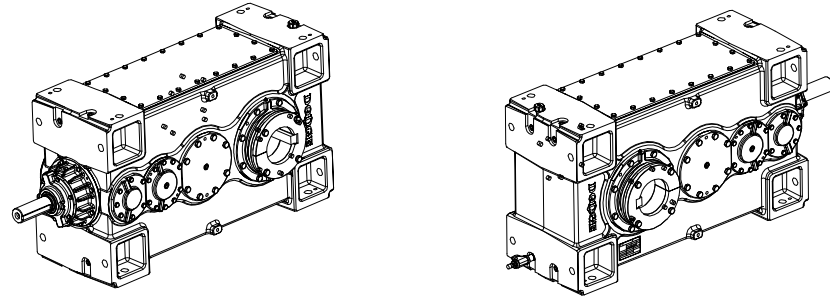

BORE DIA.	'A'	'B'
7"	6.014"	1-3/4"
6-1/2"	5.662"	1-1/2"
6-7/16"	5.599"	1-1/2"
6"	5.155"	1-1/2"
5-15/16"	5.091"	1-1/2"
5-7/16"	4.740"	1-1/4"
4-15/16"	4.232"	1-1/4"
160mm	147mm	40mm
150mm	138mm	36mm
130mm	119mm	32mm
125mm	114mm	32mm

GEOMETRIC SYMBOLS		BALDOR ELECTRIC CO. PROPRIETARY AND CONFIDENTIAL. THIS DRAWING IS THE PROPERTY OF BALDOR ELECTRIC CO. AND/OR ITS SUBSIDIARIES AND IS NOT TO BE USED, DUPLICATED OR DISCLOSED WITHOUT THE EXPRESS WRITTEN PERMISSION OF THE COMPANY.		REVISION					
FLATNESS		DBM	FJK	B	03-25-09	DBM	ADDED 453926 TO DWG		
STRAIGHTNESS		TFE	TFE	A	05/27/08	MK	ADDED BUSHING DATA		
ROUNDNESS		ECR	NO.	CHK	DFT	REV	DATE	APP'D	REVISION
CYLINDRICITY		MATERIAL		DIMENSION TOLERANCE UNLESS OTHERWISE SPECIFIED		PRODUCT		DIST	
PROFILE(LINE)		CASTING OR FORGING NO.		MACHINE TOL. S022		MAGNAGEAR 390K			
PROFILE(SURFACE)		TREATMENT		CASTING TOL. S249		PART		RIGHT ANGLE HOLLOW OUTPUT ASSEMBLY LAYOUT	
PARALLELISM		DATE		FABRICATING TOL. S356		SCALE		ORDER NUMBER	
PERPENDICULARITY		DATE		BRK ALL SHRP CORNRS 0.005-0.015		0.188		ESTIMATE NUMBER	
ANGULARITY		DATE		APPROVED BY		DATE		SHEET NUMBER	
CIRCULAR RUNDUT		DATE		ESTERLE		DATE		2 OF 4	
TRUE POSITION		DATE		DATE		DATE		DRAWING NUMBER	
CONCENTRICITY		DATE		DATE		DATE		451700-HLW	
TOTAL RUNDUT		DATE		DATE		DATE			